

MK 140 mobile construction crane


Technical data

Max. lifting capacity	8,000 kg
Max. reach	58.5 m / 65.0 m
Max. lifting capacity at jib head	1,900 kg ^{*1,2} / 1,000 kg ^{*1}



LIEBHERR

Trolley mode

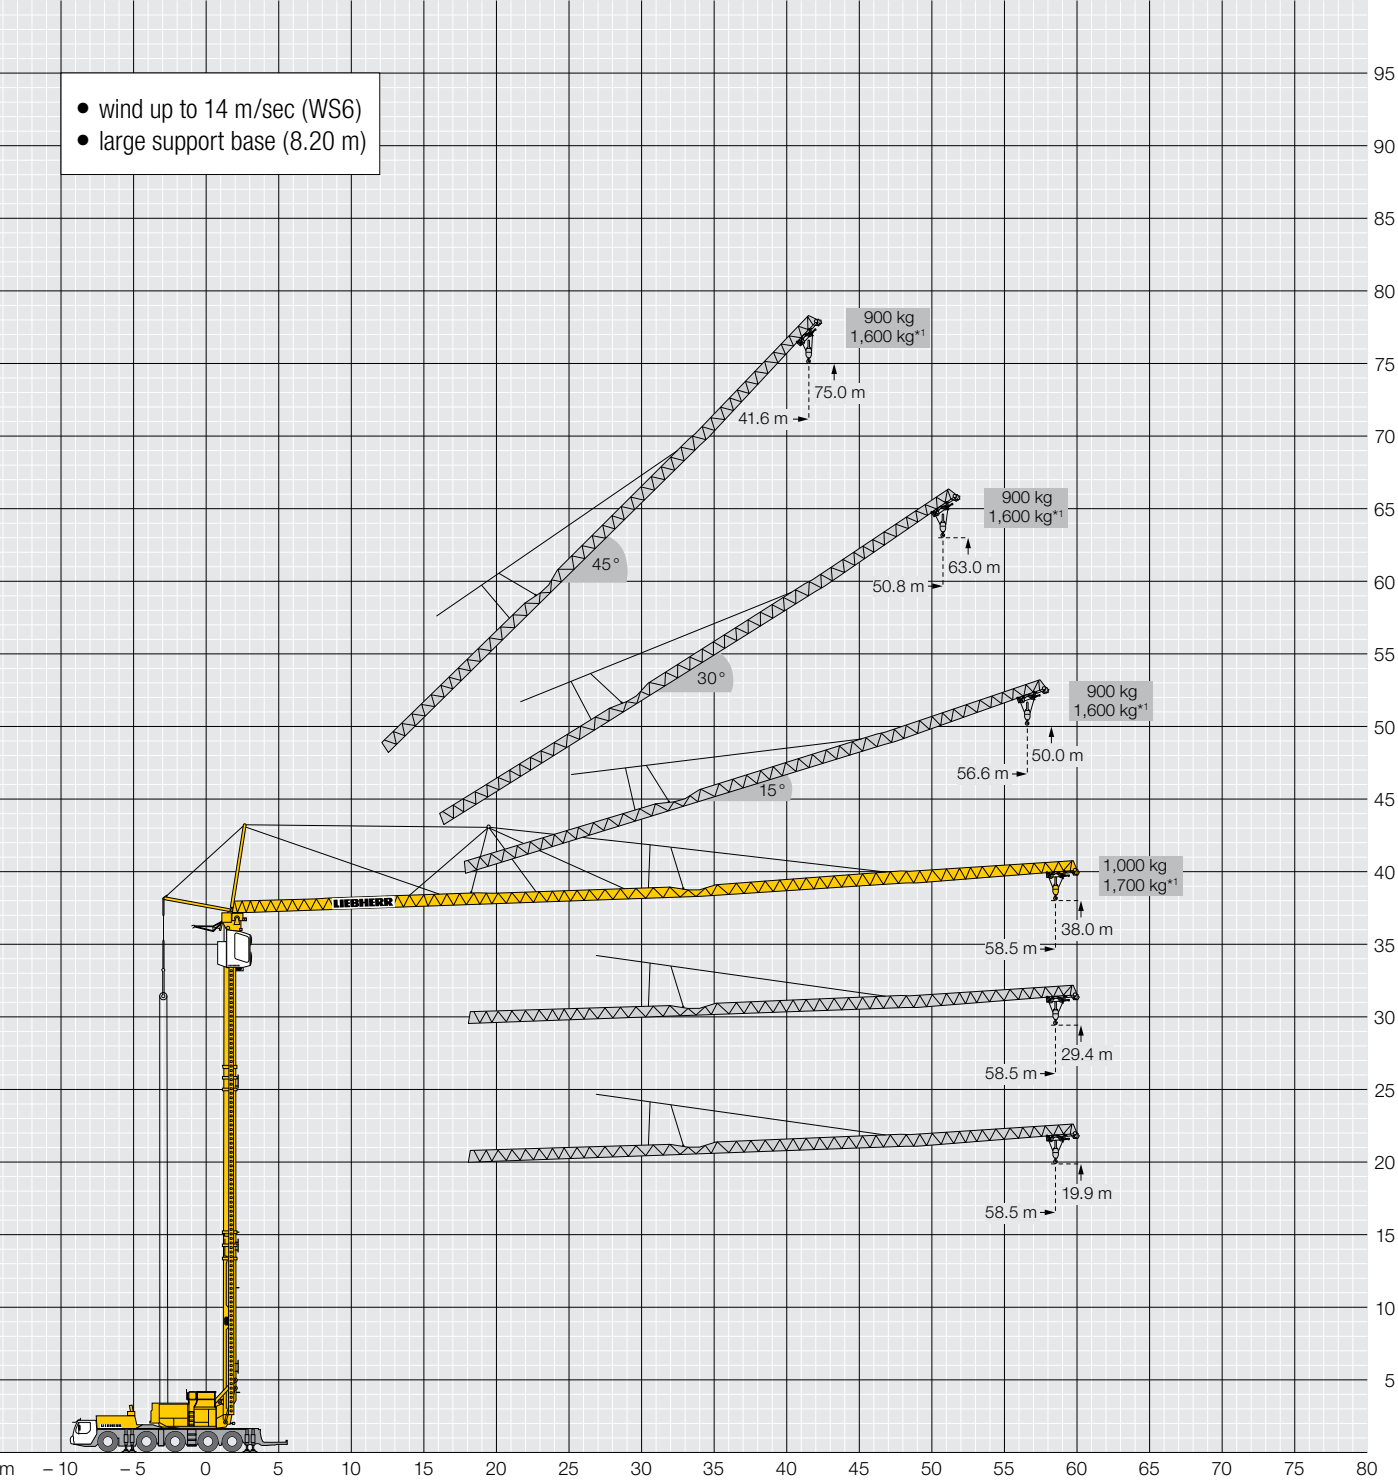


Lifting capacities at jib head with additional ballast variants

	without ballast	ballast I	ballast II	ballast III
Additional ballasts	+ 0.0 t	+ 3.0 t	+ 6.0 t (ballast I + II)	+ 9.0 t (ballast I + II + III)
Lifting capacity at jib head	1.0 t	1.25 t	1.55 t	1.7 t / 1.9 t*2

*1 Load capacities with 9.0 t additional ballast
*2 Plus load curves with control limitations in comparison to standard load curve. See the operating manual for more details.

Special mode – Luffing jib mode

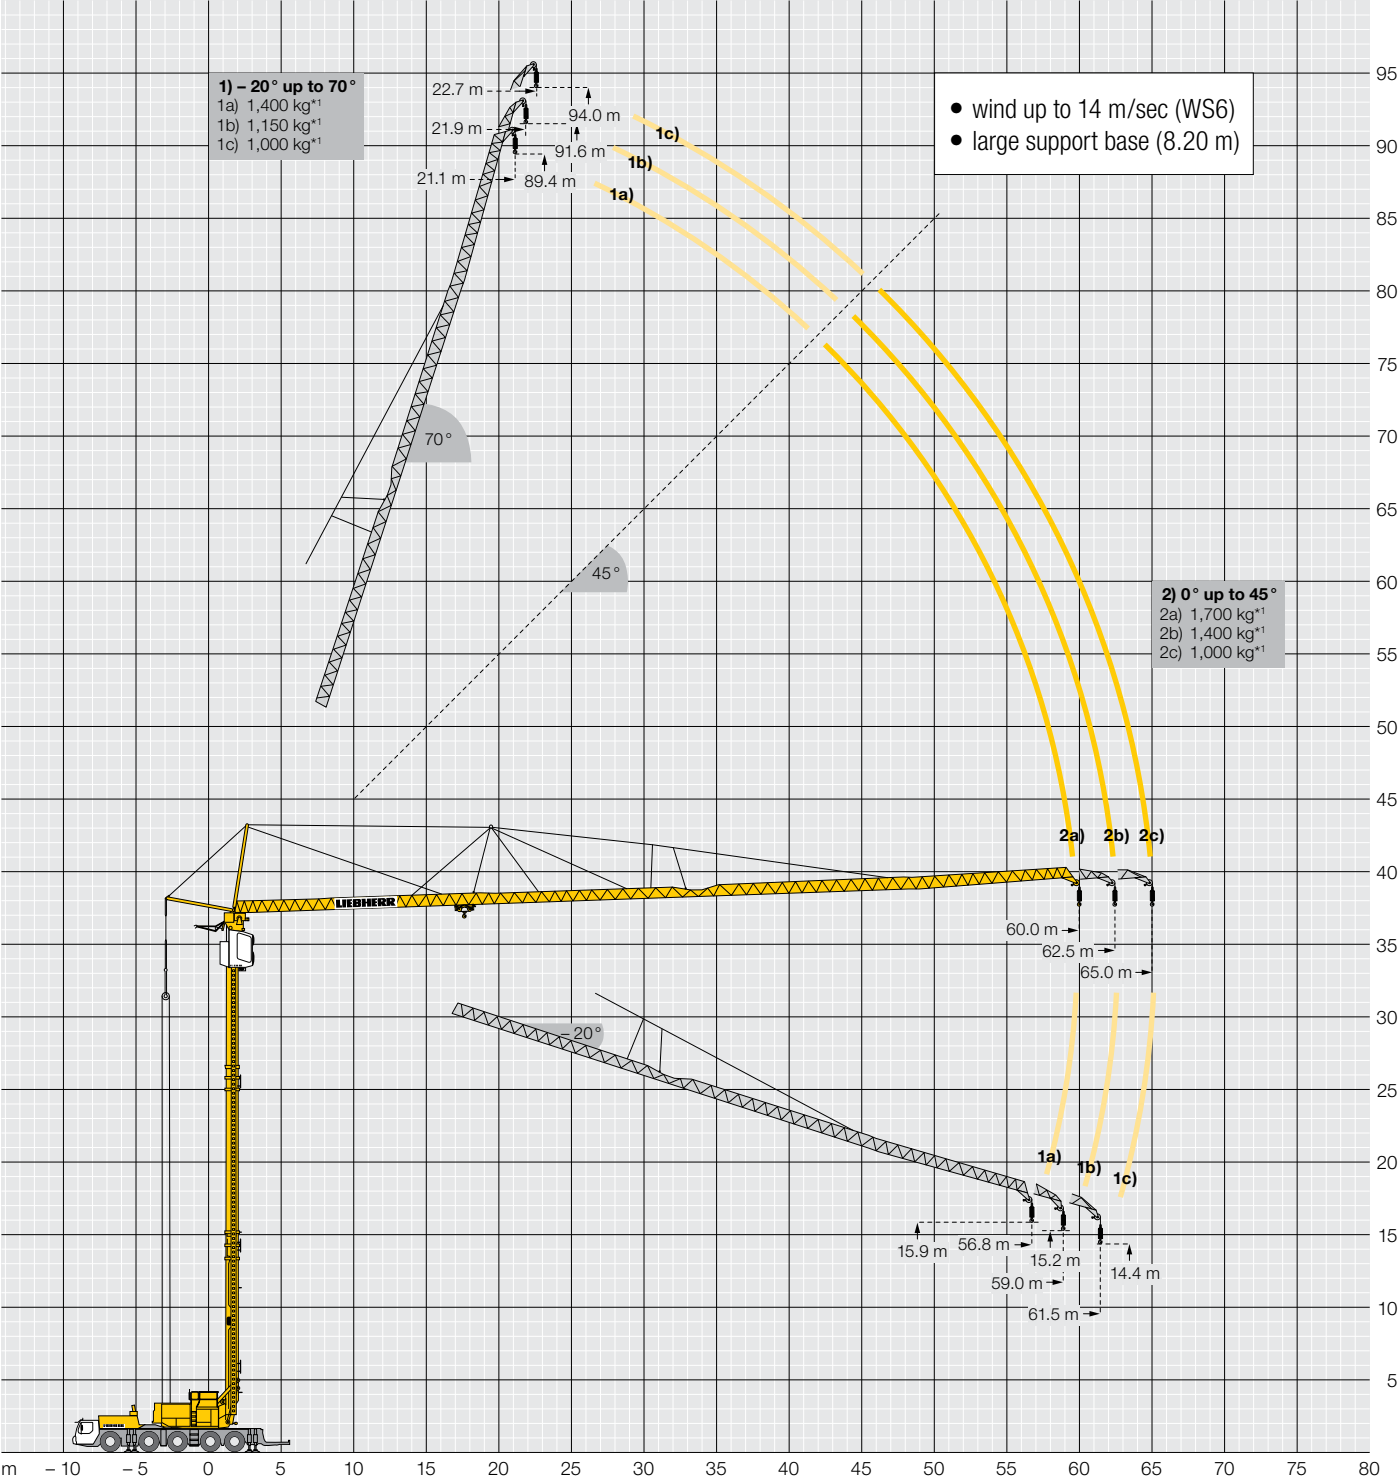


Lifting capacities with additional jib head

	a – without additional jib head	b – lattice jib head 1	c – lattice jib head 1 + 2
Radius	60.0 m	62.5 m	65.0 m
Lifting capacities at jib head (–20° up to 70°)*1	1.4 t	1.15 t	1.0 t
Lifting capacities at jib head (0 up to +45°)*1	1.7 t	1.4 t	1.0 t

*1 Load capacities with 9.0 t additional ballast

Transport

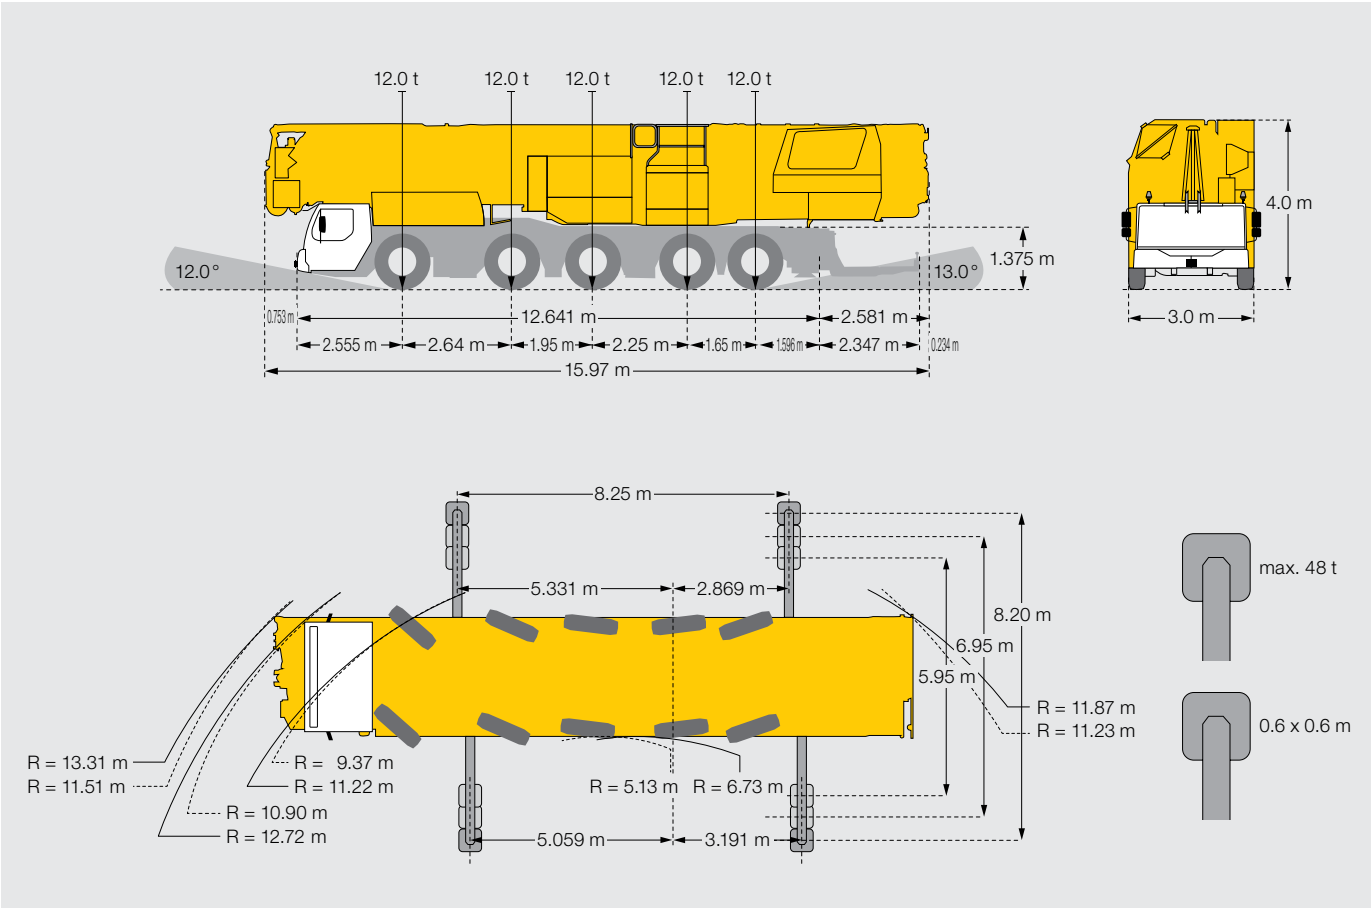

Weight

